

APEX

INSTRUCTIONS

Compact Reel **System**



Care and service:

The finish is highly resistant to salt and most chemicals. Strong acids should be avoided such as mag wheel cleaner.

The reel is rebuildable but is unlikely to need rebuilding if used properly. If there is damage and it is worthwhile to rebuild, contact APEX for replacement parts.

Mounting outdoors:

While the reel is resilient to dirt and snow, mounting in a truck bed or outdoors without protection from ice and snow may cause reeling issues. Reel may be power washed but remember to protect the air chuck from dirt and water intrusion. The hose and other parts are UV resistant. Direct sunlight is OK.




Compact Reel System

Reel Install Notes

For NPT threads use
Teflon tape or pipe
dope to seal.





MORE INFORMATION
AND VIDEOS

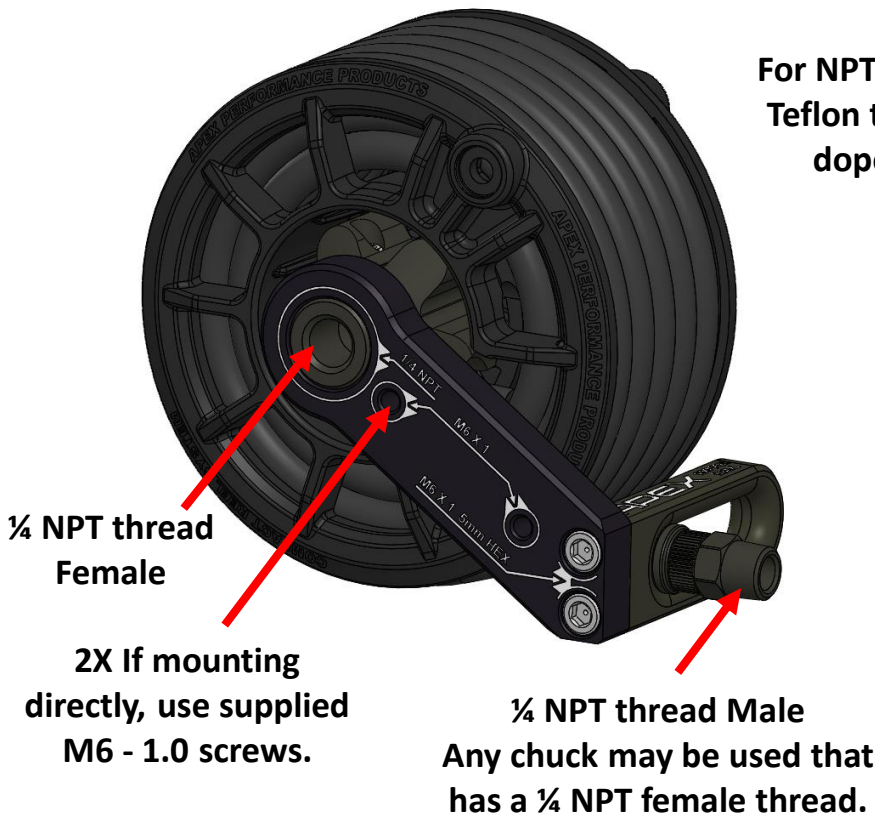

When reeling in, guide hose in a manner to neatly nest inline from side to side. Hold some tension on reel knob once reeled in and lock knob. This will prevent rattles.

Remove tape from the nut already installed on the reel.
Remove nut from knob (extra)
Use 5mm hex to install knob

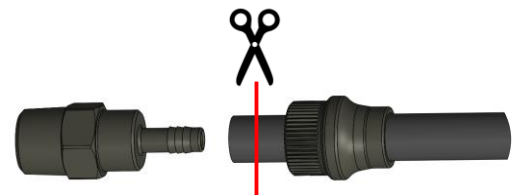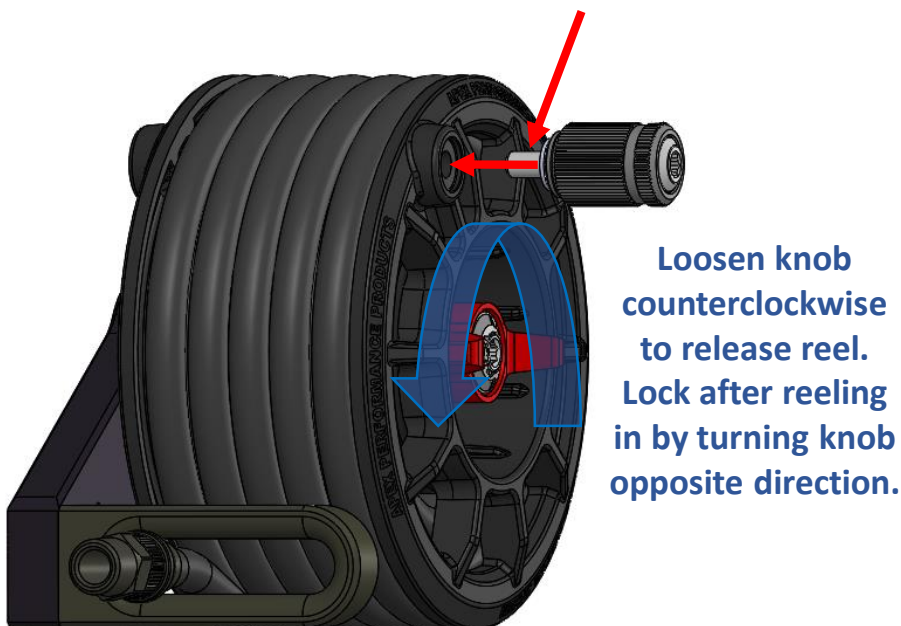

The hose may be shortened by unscrewing sleeve and sliding sleeve back. Remove hose from barb and cut hose using sharp razor blade. Push barb into hose and screw sleeve onto barb fitting.